



**INDEX**

<b>S. No.</b>	<b>Date</b>	<b>Topic</b>	<b>PAGE NO</b>	<b>MARK</b>	<b>SIGN</b>
1.		Introduction about Android App Development			
2.		Installation of IntelliJ idea 15, SDK, AVD			
3.		Working with GUI Components, Fonts and Colors.			
4.		Working with Layout Managers and Event Listeners			
5.		Native Calculator App			
6.		Basic Graphics Primitive			
7.		Accessing Database in App			
8.		RSS FEED			
9.		Implementing Multi Threading			
10.		GPS LOCATOR			
11.		Writing Data to the SD Card			
12.		Alert Notification Message			
13.		ALARM CLOCK			
14.		MODEL EXAMINATION			

## EX NO 1.a

## Running the GUI Components, Fonts, Colors App


### Aim:

To create a program to illustrates the GUI Components and Colors for Android App

### Algorithm :

#### Step 1: Design

1. Open the actual Project folder(app) in Android Studio IDE
2. Click res directory -> layout -> activity\_main.xml -> Design
3. Insert the GUI components to Design view in activity\_main.xml
4. Enter the id for each component

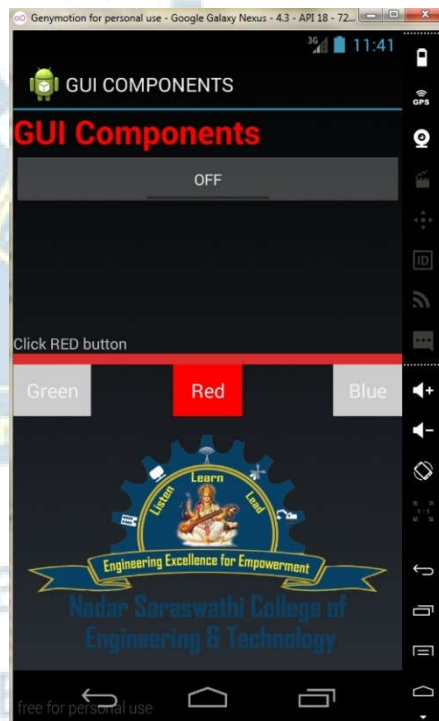

**Step 2:** Open res directory -> layout -> activity\_main.xml and add following code

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools" android:layout_width="match_parent"
    android:layout_height="match_parent" android:paddingLeft="@dimen/
    activity_horizontal_margin"
    android:paddingRight="@dimen/activity_horizontal_margin"
    android:paddingTop="@dimen/activity_vertical_margin"
    android:paddingBottom="@dimen/activity_vertical_margin"
    tools:context=".MainActivity">
<TextView
```

```
android:layout_width="+match_parent"
android:layout_height="wrap_content"
android:text="GUI Components"
android:id="@+id/t1"
android:layout_alignParentTop="true"
android:layout_alignParentEnd="false"
android:layout_alignParentStart="false"
android:autoText="false"
android:minHeight="40dp"
android:textStyle="bold"
android:textSize="30dp"
android:textIsSelectable="false"
android:textAlignment="center"
android:textColor="@color/accent_material_dark" />
<Button
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:text="Green"
android:id="@+id/b1"
android:layout_alignTop="@+id/b2"
android:layout_alignParentStart="true" />
<Button
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:text="Red"
android:id="@+id/b2"
android:layout_centerVertical="true"
android:layout_centerHorizontal="true" />
<Button
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:text="Blue"
android:id="@+id/b3"
android:layout_alignTop="@+id/b2"
android:layout_alignEnd="@+id/t1" />
<ImageView
android:layout_width="match_parent"
android:layout_height="match_parent"
android:id="@+id/img1"
android:maxHeight="70dp"
android:layout_alignParentBottom="true"
android:src="@mipmap/ic_launcher"
android:layout_alignParentEnd="true"
android:layout_below="@+id/b1" />
<ImageButton
```

```
android:layout_width="match_parent"

android:layout_height="wrap_content"
android:id="@+id/imgb1"
android:maxHeight="10dp"
android:maxLength="10dp"
android:longClickable="false"
android:visibility="visible"
android:minHeight="10dp"
android:contentDescription="CLICK BUTTON"
android:layout_gravity="left|top|bottom|center|right"
android:layout_above="@+id/b1"
android:layout_alignEnd="@+id/b3"
style="@style/AlertDialog.AppCompat.Light"
android:background="#dd2e2e"
android:layout_marginLeft="@dimen/
abc_action_bar_subtitle_bottom_margin_material"
android:layout_marginRight="@dimen/
abc_action_bar_subtitle_bottom_margin_material"
android:layout_marginBottom="@dimen/
abc_action_bar_subtitle_bottom_margin_material" />
<TextView
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="Click RED button"
android:id="@+id/textView"
android:layout_above="@+id/imgb1"
android:layout_alignStart="@+id/imgb1" />
<ToggleButton
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="New ToggleButton"
android:id="@+id/toggleButton"
android:layout_below="@+id/t1"
android:layout_centerHorizontal="true" />
</RelativeLayout>
```

**Step 3:** Open your Android studio project folder  
(e.g. Project name: GUI Components ) —>Click app ->src -> main -> res ->drawable -> add  
\*.png file.

**Step 4:** Open java -> MainActivity.java and add following code

```
package com.example.GUI_COMPONENTS;
import android.graphics.Color;
import android.graphics.drawable.BitmapDrawable;
```

```
import android.graphics.drawable.Drawable;
import android.media.Image;

import android.app.Activity;
import android.os.Bundle;
import android.util.Log;
import android.view.View;
import android.widget.Button;
import android.widget.ImageButton;
import android.widget.ImageView;
import android.widget.TextView;
import org.w3c.dom.Text;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
public class MainActivity extends Activity {
    TextView text;
    Button bu1,bu2,bu3;
    ImageView image1;
    ImageButton image2;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main)
        bu1=(Button) findViewById(R.id.b1);
        bu2=(Button) findViewById(R.id.b2);
        bu3=(Button) findViewById(R.id.b3);
        text=(TextView) findViewById(R.id.t1);
        image1=(ImageView)findViewById(R.id.img1);
        image2=(ImageButton)findViewById(R.id.imgb1);

        image2.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                image1.setImageResource(R.drawable.corel);
            }
        });
        bu1.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                bu1.setBackgroundColor(Color.GREEN);
                text.setTextColor(Color.GREEN);
                bu2.setBackgroundColor(Color.LTGRAY);
                bu3.setBackgroundColor(Color.LTGRAY);
            }
        });
        bu2.setOnClickListener(new View.OnClickListener() {
```

@Override


```
public void onClick(View v) {
    bu2.setBackgroundColor(Color.RED);
```

```
    bu3.setBackgroundColor(Color.LTGRAY);
    bu1.setBackgroundColor(Color.LTGRAY);
    text.setTextColor(Color.RED);
    });
    bu3.setOnClickListener(new View.OnClickListener() {
```

@Override

```
public void onClick(View v) {
    bu3.setBackgroundColor(Color.BLUE);
    text.setTextColor(Color.BLUE);
    bu2.setBackgroundColor(Color.LTGRAY);
    bu1.setBackgroundColor(Color.LTGRAY);
    });
    }
}
```

**Step 5:** The output of the above code is as follows. As we have discussed, GUI Components and Colors App is easy.

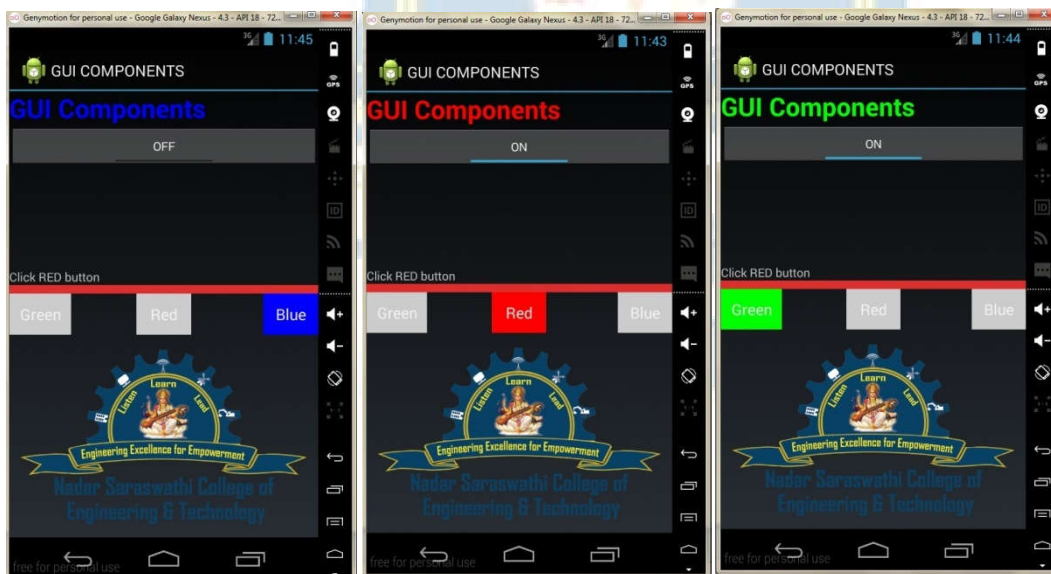

**Step 6:** Thus program to illustrate the GUI Components and Colors for Android App was created.

## EX NO 1B

## Running the Fonts App


### Aim:

To create a program to illustrates the Fonts App in Smart Phone.

### Algorithm:

#### Step 1: Design

1. Open the actual Project folder (app) in Android Studio IDE
2. Click res directory -> layout -> activity\_main.xml -> Design
3. Insert the GUI components to Design view in activity\_main.xml
4. Enter the id for each component

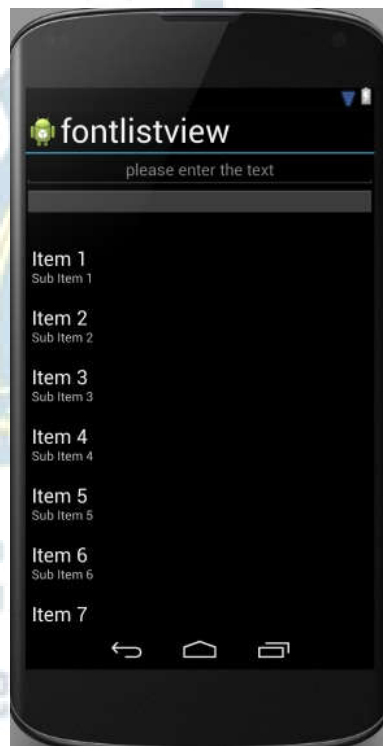

#### Step 2: Create assets sub directory in res

Right click res -> New -> Folder -> New Assets Folder

Right click assets -> New -> Directory -> Enter the directory name (fonts)

Paste the font types in font's directory

#### Step 3: Open res directory -> layout -> activity\_main.xml and add following code

```
<?xml version="1.0" encoding="utf-8"?>  
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
```

```
        android:orientation="vertical"
        android:layout_width="fill_parent"
        android:layout_height="fill_parent" >
<EditText
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:id="@+id/et1" android:layout_alignParentTop="true"
android:layout_centerHorizontal="true"
    android:gravity="center" android:editable="true" android:hint="please enter the text"/>
<ImageButton
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:id="@+id/imageButton" android:layout_below="@+id/et1"
android:layout_centerHorizontal="true"/>
<TextView
    android:layout_width="fill_parent"
    android:layout_height="wrap_content"
    android:textAppearance="?android:attr/textAppearanceLarge"
    android:id="@+id/tv1" android:layout_below="@+id/imageButton"
android:layout_centerHorizontal="true"
    android:gravity="center"/>
<ListView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:id="@+id/lv1" android:layout_below="@+id/tv1"
android:layout_centerHorizontal="true"/>
</RelativeLayout>
```

**Step 4:** Create an activity file

**MainActivity.java**

```
package com.example.fontlistview;
import android.app.Activity;
import android.graphics.Typeface;
import android.os.Bundle;
import android.view.View;
import android.widget.*;

public class MyActivity extends Activity {
    ListView listview;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
```





```
setContentview(R.layout.main);
final TextView txt=(TextView)findViewById(R.id.tv1);
final EditText e1=(EditText)findViewById(R.id.et1);
listview=(ListView)findViewById(R.id.lv1);
String[] values = new String[] { "Vivaldii", "Cantate Beveled", "JOKERMAN",
    "Krinkes Regular PERSONAL", "BAUHS93", "Sweetly Broken", "Xerox Sans Serif
Narrow Bold", "Xacto Blade" };
ArrayAdapter<String> adapter = new ArrayAdapter<String>(this,
    android.R.layout.simple_dropdown_item_1line,values);
listview.setAdapter(adapter);
listview.setOnItemClickListener(new AdapterView.OnItemClickListener() {
    @Override
    public void onItemClick(AdapterView<?> parent, View view, int position, long id)
    {
        String itemValue = (String) listview.getItemAtPosition(position);
        if(itemValue.equals("Vivaldii"))
        {
            txt.setText(e1.getText().toString());
            String fontPath="fonts/VIVALDII.ttf";
            Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
            txt.setTypeface(tf);
        }
        if(itemValue.equals("Cantate Beveled"))
        {
            txt.setText(e1.getText());
            String fontPath="fonts/Cantate Beveled.ttf";
            Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
            txt.setTypeface(tf);
        }
        if(itemValue.equals("JOKERMAN"))
        {
            txt.setText(e1.getText());
            String fontPath="fonts/JOKERMAN.ttf";
            Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
            txt.setTypeface(tf);
        }
        if(itemValue.equals("Krinkes Regular PERSONAL"))
        {
            txt.setText(e1.getText());
            String fontPath="fonts/KrinkesRegularPERSONAL.ttf";
            Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
            txt.setTypeface(tf);
        }
        if(itemValue.equals("BAUHS93"))
```




```
{

    txt.setText(e1.getText());
    String fontPath="fonts/BAUHS93.ttf";
    Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
    txt.setTypeface(tf);
}
if(itemValue.equals("Sweetly Broken"))
{
    txt.setText(e1.getText());
    String fontPath="fonts/Sweetly Broken.ttf";
    Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
    txt.setTypeface(tf);
}
if(itemValue.equals("Xerox Sans Serif Narrow Bold"))
{
    txt.setText(e1.getText());
    String fontPath="fonts/Xerox Sans Serif Narrow Bold.ttf";
    Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
    txt.setTypeface(tf);
}
if(itemValue.equals("Xacto Blade"))
{
    txt.setText(e1.getText());
    String fontPath="fonts/Xacto Blade.ttf";
    Typeface tf = Typeface.createFromAsset(getAssets(), fontPath);
    txt.setTypeface(tf);
}
});}

}
```

## Step 5: Output

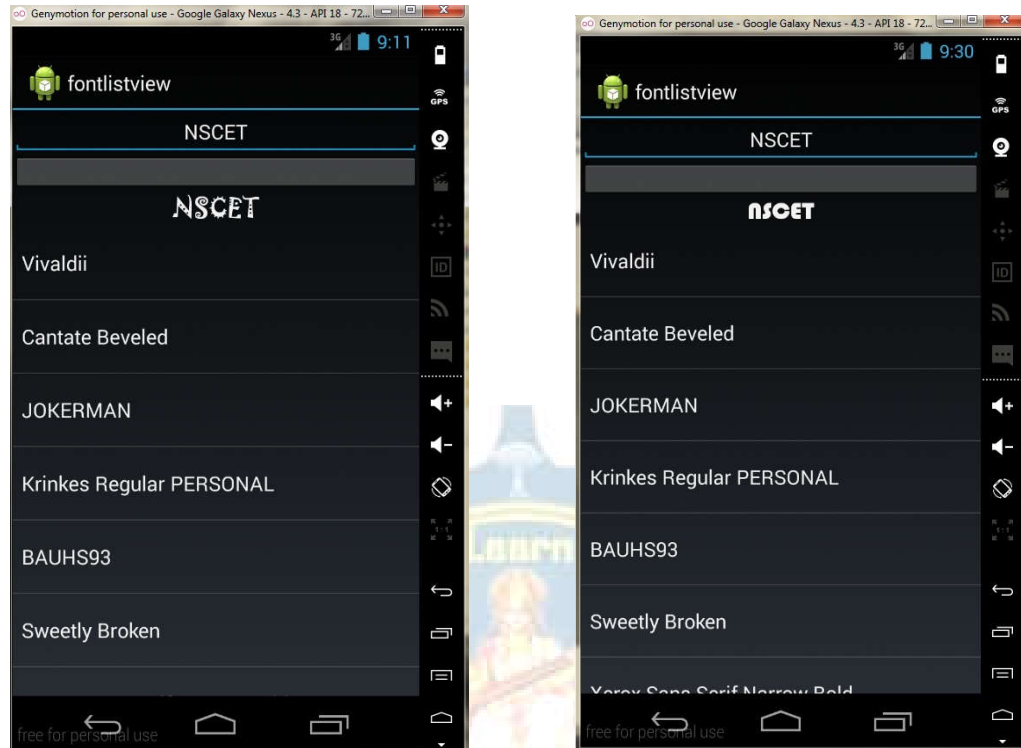

**Step 6:** Thus program to illustrate the font for Android App was created.


## EX NO 2                      Running the Layout Managers and Event Click Listener

**Step 1:** Create an android project using android studio


**Step 2:** After creating the project, open the res directory -> layout -> resource file named activity\_main.xml

**Step 3:** Create two resource (\*.xml) file named activity\_second.xml, activity\_third.xml & two activity (\*.java) file named second.java and third.java file.


Right click res directory -> New -> Activity -> Empty Activity

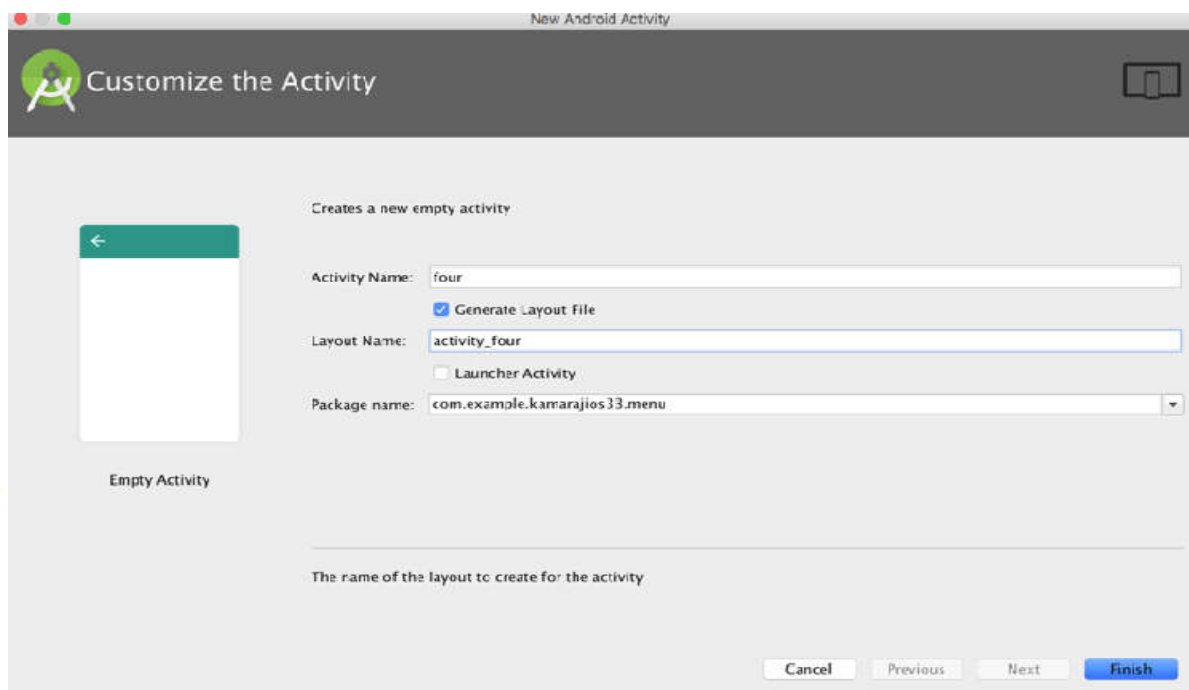

**Step 4:** Create new Resource directory named menu and new resource file named menu  
Right click res directory -> New -> Android Resource Directory -> resource type ->  
select menu -> finish

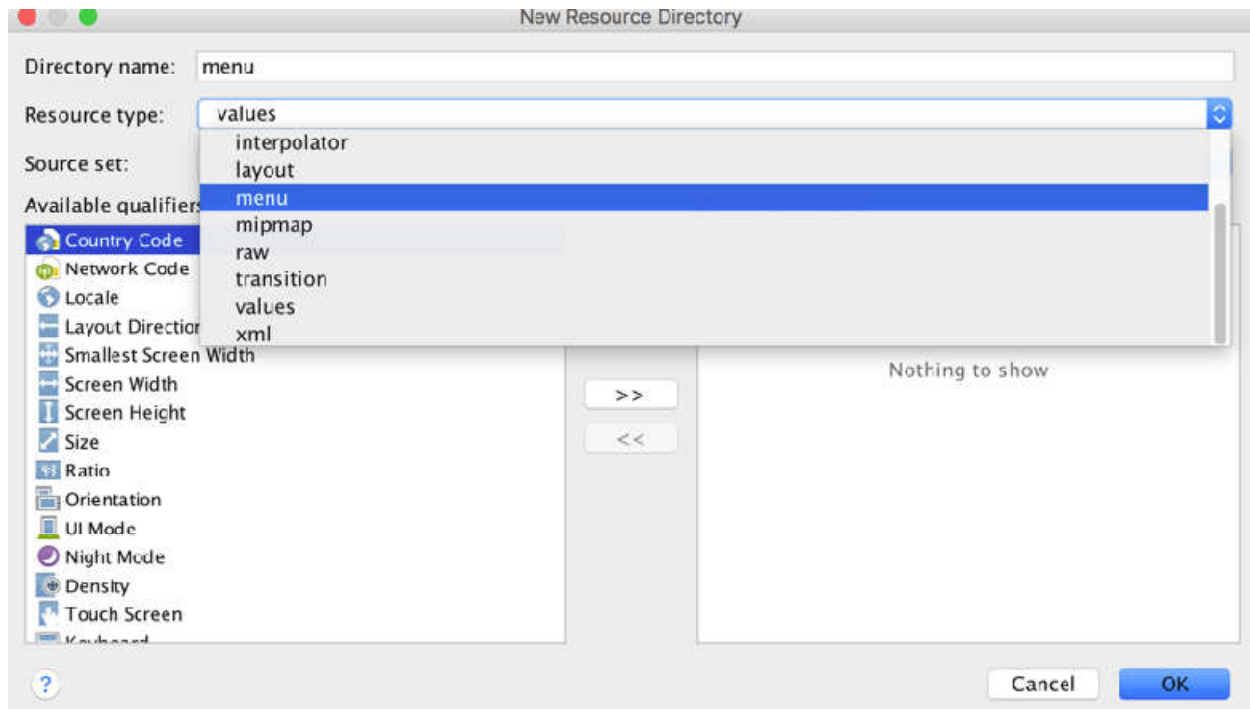

Right click menu directory -> New -> new menu resource file -> enter file name -> Ok

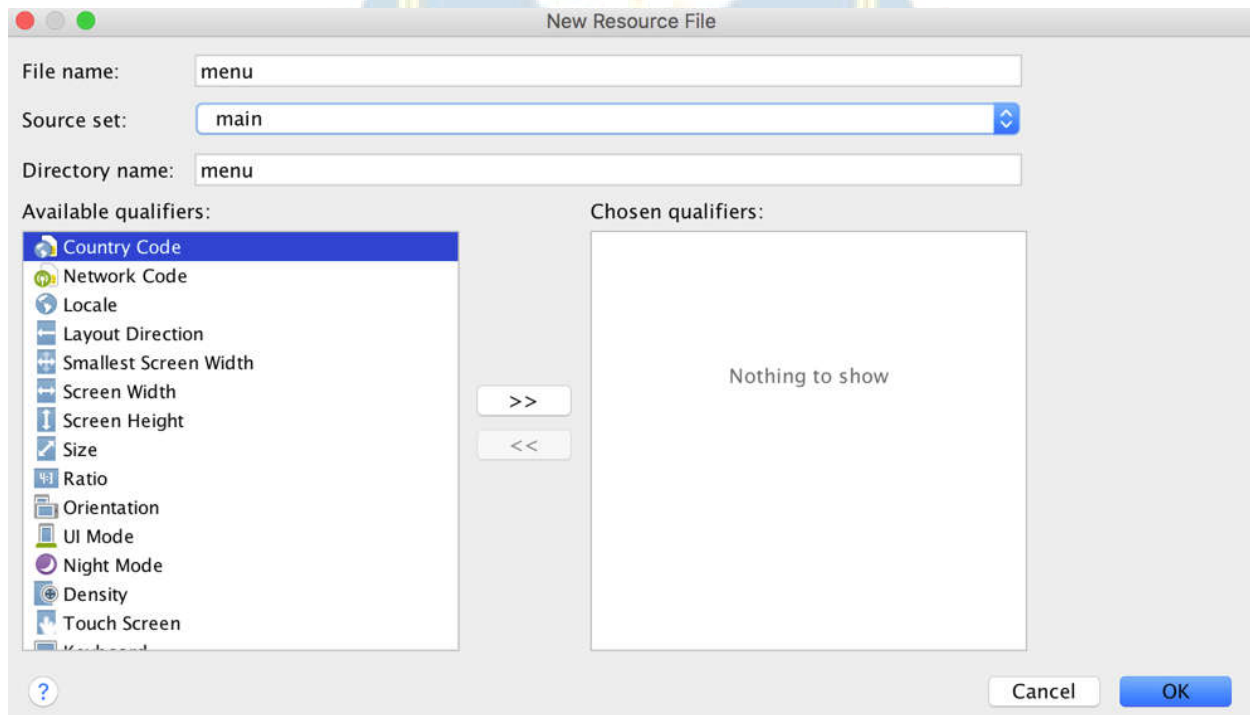


**Step 5:** Design (After the design, the xml code will be generated automatically in the layout file)

**activity\_main.xml**



**activity\_second.xml**

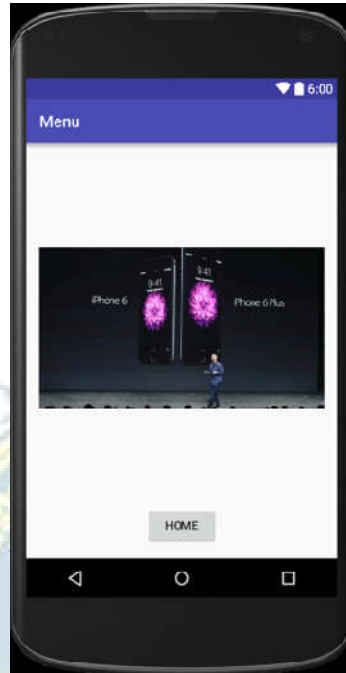

**activity\_third.xml**



**Step 6:** Open **menu.xml** and add the following code

```
<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:tools="http://schemas.android.com/tools"
tools:context="com.example.kamarajios33.menu.MainActivity">
<item
android:id="@+id/one"
android:title="One"/>
<item
android:id="@+id/two"
android:title="Two"/>
</menu>
```

**Step 7:** Open **MainActivity.java**, **second.java** & **third.java** and add the following code

#### **MainActivity.java**

```
public class MainActivity extends AppCompatActivity {
Button b1;
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
```

```
setContentView(R.layout.activity_main);
b1=(Button)findViewById(R.id.b1);
b1.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
PopupMenu pm = new PopupMenu(MainActivity.this,b1);
pm.getMenuInflater().inflate(R.menu.menu,pm.getMenu());
pm.setOnMenuItemClickListener(new PopupMenu.OnMenuItemClickListener() {
@Override
public boolean onOptionsItemSelected(MenuItem item) {
switch (item.getItemId()) {
case R.id.one:
Intent o = new Intent(getApplicationContext(), second.class);
startActivity(o);
System.exit(0);
break;
case R.id.two:
Intent in = new Intent(getApplicationContext(),third.class);
startActivity(in);
System.exit(0);
break;
}
return false;
}
});
pm.show();
}
});
}
```

#### **second.java**

```
public class second extends AppCompatActivity {
Button b2;
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_second);
b2=(Button)findViewById(R.id.b2);
ImageView iv = (ImageView)findViewById(R.id.iv);
b2.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
Intent i = new Intent(getApplicationContext(),MainActivity.class);
startActivity(i);
System.exit(0);
}
```

```
}  
  
});  
}  
}
```


### **Third.java**

```
public class third extends AppCompatActivity {  
    Button back;  
    ImageView img;  
    @Override  
    protected void onCreate(Bundle savedInstanceState) {  
        super.onCreate(savedInstanceState);  
        setContentView(R.layout.activity_third);  
        back=(Button)findViewById(R.id.back);  
        img=(ImageView)findViewById(R.id.imageView);  
        back.setOnClickListener(new View.OnClickListener() {  
            @Override  
            public void onClick(View v) {  
                Intent i = new Intent(getApplicationContext(),MainActivity.class);  
                startActivity(i);  
                System.exit(0);  
            }  
        });  
    }  
}
```

**Step 8:** The output of the above code is as follows.

Nadar Saraswathi College of  
Engineering & Technology



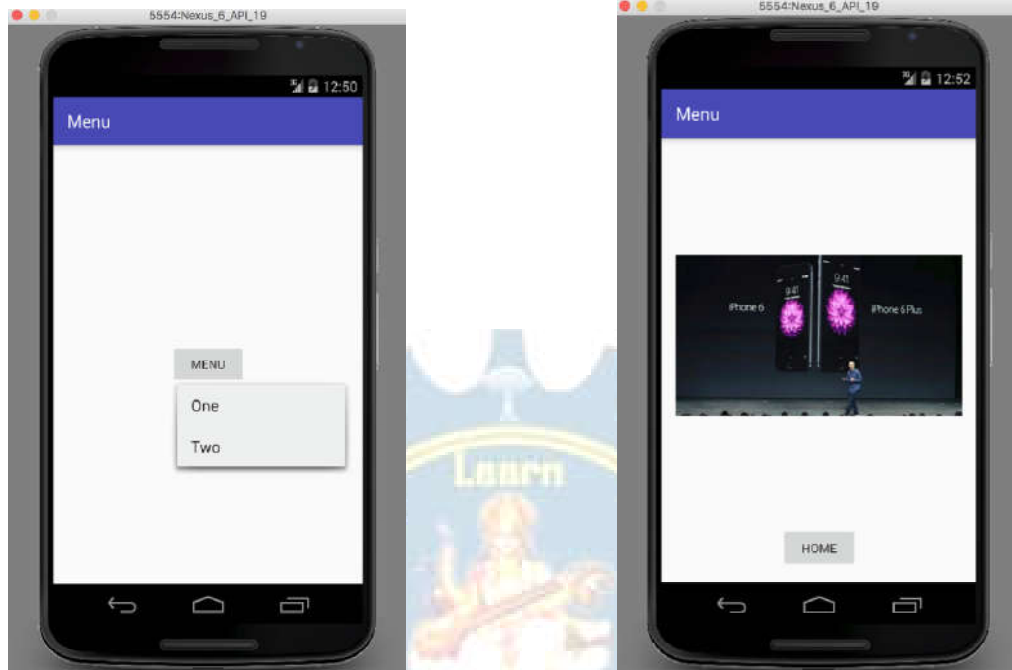

Engineering Excellence for Empowerment

Nadar Saraswathi College of  
Engineering & Technology

## EX NO 3

## Native Calculator Application

### AIM:

To create an Application to illustrates Native calculator application in Android.

### Algorithm:

**Step 1:** Design for UI in layout file (activity\_main.xml)



### activity\_main.xml

```
<LinearLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
android:orientation="vertical"
android:paddingBottom="@dimen/activity_vertical_margin"
android:paddingLeft="@dimen/activity_horizontal_margin"
android:paddingRight="@dimen/activity_horizontal_margin"
android:paddingTop="@dimen/activity_vertical_margin"
tools:context=".Home" android:background="#fff"
android:weightSum="1">
<LinearLayout
android:orientation="horizontal"
android:layout_width="match_parent"
android:layout_height="72dp"
android:id="@+id/onoff">
<Switch
```

```
android:layout_width="match_parent"
android:layout_height="match_parent"
android:id="@+id/switch1"
android:checked="false" />
</LinearLayout>
<LinearLayout
android:orientation="horizontal"
android:layout_width="match_parent"
android:layout_height="55dp"
android:layout_gravity="center_horizontal"
android:id="@+id/l1">
<EditText
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:id="@+id/display"
android:hint="Enter the Values"
android:layout_weight="1" />
</LinearLayout>
<LinearLayout
android:orientation="horizontal"
android:layout_width="fill_parent"
android:layout_height="wrap_content"
android:gravity="center"
android:paddingTop="20dp"
android:id="@+id/l5">
<Button android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/one"
android:text="1" />
<Button android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/two"
android:text="2" />
<Button android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/three"
android:text="3" />
<Button android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/div"
android:text="/" />
</LinearLayout>
<LinearLayout
android:orientation="horizontal"
android:layout_width="fill_parent"
```

```
android:layout_height="wrap_content"
android:layout_gravity="center"
android:gravity="center"
android:paddingTop="20dp"
android:id="@+id/12">
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/four"
android:text="4" />
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/five"
android:text="5" />
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/six"
android:text="6" />
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/mul"
android:text="*" />
</LinearLayout>
<LinearLayout
android:orientation="horizontal"
android:layout_width="fill_parent"
android:layout_height="wrap_content"
android:gravity="center"
android:paddingTop="20dp"
android:id="@+id/13">
<Button android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/seven"
android:text="7" />
<Button android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/eight"
android:text="8" />
<Button android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/nine"
android:text="9" />
<Button android:layout_width="55dp"
```



Nadar Saraswathi College of  
Engineering & Technology

```
android:layout_height="wrap_content"
android:id="@+id/sub"
android:text="-" />
</LinearLayout>
<LinearLayout
android:orientation="horizontal"
android:layout_width="fill_parent"
android:layout_height="wrap_content"
android:gravity="center"
android:paddingTop="20dp"
android:id="@+id/14">
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/cancel"
android:text="C" />
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/zero"
android:text="0" />
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/equal"
android:text="=" />
<Button
android:layout_width="55dp"
android:layout_height="wrap_content"
android:id="@+id/add"
android:text="+" />
</LinearLayout>
</LinearLayout>
```

**Step 2:** Open MainActivity.java and add following code

```
package com.example.kamarajios33.calc;
import android.os.Bundle;
import android.app.Activity;
import android.support.annotation.RequiresPermission;
import android.text.Editable;
import android.view.Menu;
import android.view.View;
import android.widget.Button;
import android.widget.CompoundButton;
import android.widget.EditText;
import android.widget.Switch;
```

```
public class MainActivity extends Activity implements View.OnClickListener
{
    Button one, two, three, four, five, six, seven, eight, nine, zero, add, sub, mul,
    div, cancel, equal;
    EditText disp;
    int op1;
    int op2;
    String opr;
    Switch onoff;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        onoff = (Switch)findViewById(R.id.switch1);
        onoff.setChecked(true);
        one = (Button) findViewById(R.id.one);
        two = (Button) findViewById(R.id.two);
        three = (Button) findViewById(R.id.three);
        four = (Button) findViewById(R.id.four);
        five = (Button) findViewById(R.id.five);
        six = (Button) findViewById(R.id.six);
        seven = (Button) findViewById(R.id.seven);
        eight = (Button) findViewById(R.id.eight);
        nine = (Button) findViewById(R.id.nine);
        zero = (Button) findViewById(R.id.zero);
        add = (Button) findViewById(R.id.add);
        sub = (Button) findViewById(R.id.sub);
        mul = (Button) findViewById(R.id.mul);
        div = (Button) findViewById(R.id.div);
        cancel = (Button) findViewById(R.id.cancel);
        equal = (Button) findViewById(R.id.equal);
        disp = (EditText) findViewById(R.id.display);
        onoff.setOnCheckedChangeListener(new
        CompoundButton.OnCheckedChangeListener() {
            @Override
            public void onCheckedChanged(CompoundButton buttonView, boolean
            isChecked) {
                if(isChecked)
                {
                    one.setEnabled(true);
                    two.setEnabled(true);
                    three.setEnabled(true);
                    four.setEnabled(true);
                    five.setEnabled(true);
                    six.setEnabled(true);
                    seven.setEnabled(true);
```

```
eight.setEnabled(true);
nine.setEnabled(true);
zero.setEnabled(true);
add.setEnabled(true);
sub.setEnabled(true);
mul.setEnabled(true);
sub.setEnabled(true);
mul.setEnabled(true);
div.setEnabled(true);
cancel.setEnabled(true);
equal.setEnabled(true);
disp.setEnabled(true);
}
else
{
one.setEnabled(false);
two.setEnabled(false);
three.setEnabled(false);
four.setEnabled(false);
five.setEnabled(false);
six.setEnabled(false);
seven.setEnabled(false);
eight.setEnabled(false);
nine.setEnabled(false);
zero.setEnabled(false);
add.setEnabled(false);
sub.setEnabled(false);
mul.setEnabled(false);
sub.setEnabled(false);
mul.setEnabled(false);
div.setEnabled(false);
cancel.setEnabled(false);
equal.setEnabled(false);
disp.setEnabled(false);
}
});
try {
one.setOnClickListener(this);
two.setOnClickListener(this);
three.setOnClickListener(this);
four.setOnClickListener(this);
five.setOnClickListener(this);
six.setOnClickListener(this);
seven.setOnClickListener(this);
eight.setOnClickListener(this);
```

```
nine.setOnClickListener(this);
zero.setOnClickListener(this);
cancel.setOnClickListener(this);
add.setOnClickListener(this);
sub.setOnClickListener(this);
mul.setOnClickListener(this);
div.setOnClickListener(this);
equal.setOnClickListener(this);
} catch (Exception e) {
}
}

public void operation() {
if (optr.equals("+")) {
op2 = Integer.parseInt(dispatch.getText().toString());
dispatch.setText("");
op1 = op1 + op2;
dispatch.setText(Integer.toString(op1));
} else if (optr.equals("-")) {
op2 = Integer.parseInt(dispatch.getText().toString());
dispatch.setText("");
op1 = op1 - op2;
dispatch.setText(Integer.toString(op1));
} else if (optr.equals("*")) {
op2 = Integer.parseInt(dispatch.getText().toString());
dispatch.setText("");
op1 = op1 * op2;
dispatch.setText(Integer.toString(op1));
} else if (optr.equals("/")) {
op2 = Integer.parseInt(dispatch.getText().toString());
dispatch.setText("");
op1 = op1 / op2;
dispatch.setText(Integer.toString(op1));
}
}

@Override
public void onClick(View arg0)
{
Editable str = dispatch.getText();
switch (arg0.getId()) {
case R.id.one:
if (op2 != 0) {
op2 = 0;
dispatch.setText("");
}
str = str.append(two.getText());
dispatch.setText(str);
```




```
break;
case R.id.two:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(two.getText());
disp.setText(str);
break;
case R.id.three:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(three.getText());
disp.setText(str);
break;
case R.id.four:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(four.getText());
disp.setText(str);
break;
case R.id.five:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(five.getText());
disp.setText(str);
break;
case R.id.six:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(six.getText());
disp.setText(str);
break;
case R.id.seven:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
}
```




Nadar Saraswathi College of  
Engineering & Technology

```
str = str.append(seven.getText());
disp.setText(str);
break;
case R.id.eight:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(eight.getText());
disp.setText(str);
break;
case R.id.nine:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(nine.getText());
disp.setText(str);
break;
case R.id.zero:
if (op2 != 0) {
op2 = 0;
disp.setText("");
}
str = str.append(zero.getText());
disp.setText(str);
case R.id.cancel:
op1 = 0;
op2 = 0;
disp.setText("");
disp.setHint("Perform Operation");
break;
case R.id.add:
optr = "+";
if (op1 == 0) {
op1 = Integer.parseInt(disp.getText().toString());
disp.setText("");
}
else if (op2 != 0) {
op2 = 0;
disp.setText("");
}
else
{
op2 = Integer.parseInt(disp.getText().toString());
disp.setText("");
}
```

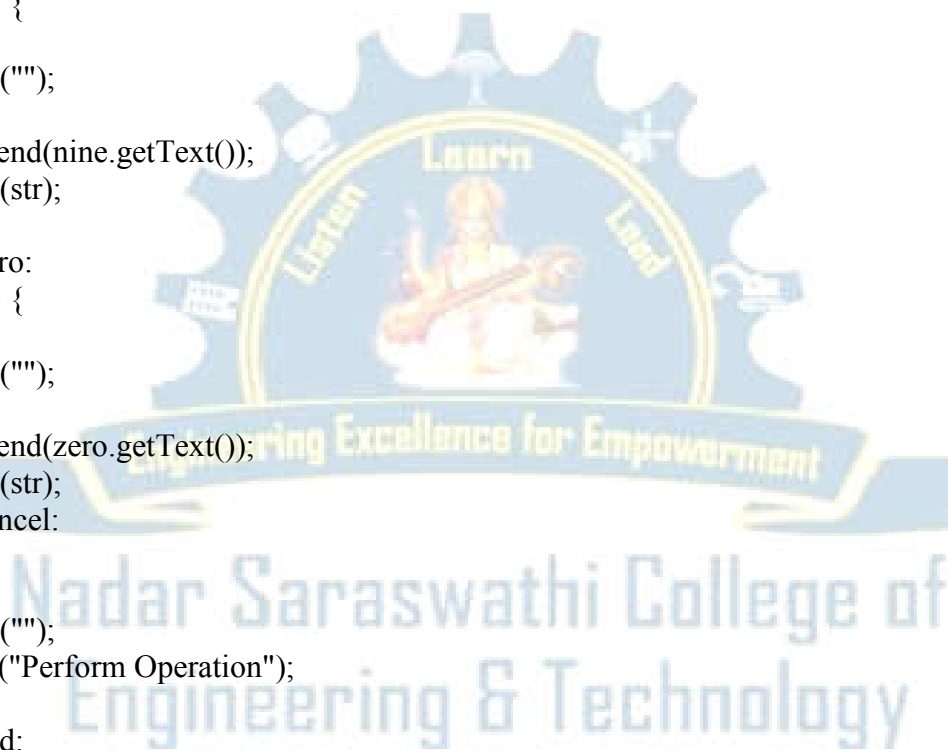

```
op1 = op1 + op2;
disp.setText(Integer.toString(op1));
}
break;
case R.id.sub:
optr = "-";
if (op1 == 0)
{
op1 = Integer.parseInt(disp.getText().toString());
disp.setText("");
}
else if (op2 != 0) {
op2 = 0;
disp.setText("");
}
else
{
op2 = Integer.parseInt(disp.getText().toString());
disp.setText("");
op1 = op1 - op2;
disp.setText(Integer.toString(op1));
}
break;
case R.id.mul:
optr = "*";
if (op1 == 0)
{
op1 = Integer.parseInt(disp.getText().toString());
disp.setText("");
}
else if (op2 != 0) {
op2 = 0;
disp.setText("");
}
else
{
op2 = Integer.parseInt(disp.getText().toString());
disp.setText("");
op1 = op1 * op2;
disp.setText(Integer.toString(op1));
}
break;
case R.id.div:
optr = "/";
if (op1 == 0)
{
```

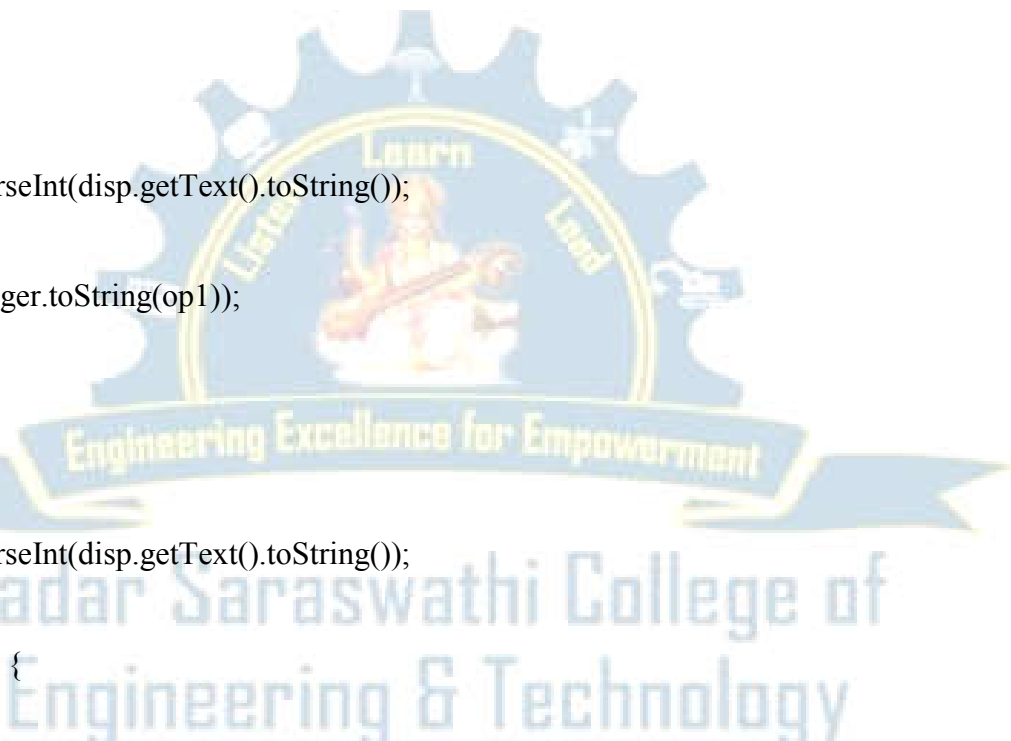


```
op1 = Integer.parseInt(dispatch.getText().toString());
dispatch.setText("");
}
else if (op2 != 0) {
op2 = 0;
dispatch.setText("");
}
else
{
op2 = Integer.parseInt(dispatch.getText().toString());
dispatch.setText("");
op1 = op1 / op2;
dispatch.setText(Integer.toString(op1));
}
break;
case R.id.equal:
if (!optr.equals(null))
{
if (op2 != 0)
{
if (optr.equals("+"))
{
dispatch.setText("");
op1 = op1 + op2;
dispatch.setText(Integer.toString(op1));
}
else if (optr.equals("-"))
{
dispatch.setText("");
op1 = op1 - op2;
dispatch.setText(Integer.toString(op1));
}
else if (optr.equals("*"))
{
dispatch.setText("");
op1 = op1 * op2;
dispatch.setText(Integer.toString(op1));
}
else if (optr.equals("/"))
{
dispatch.setText("");
op1 = op1 / op2;
dispatch.setText(Integer.toString(op1));
}
}
else
```



Nadar Saraswathi College of  
Engineering & Technology

```
{  
operation();  
}  
}  
break; }}}
```

**Step 3:** The output of the above code is as follows.

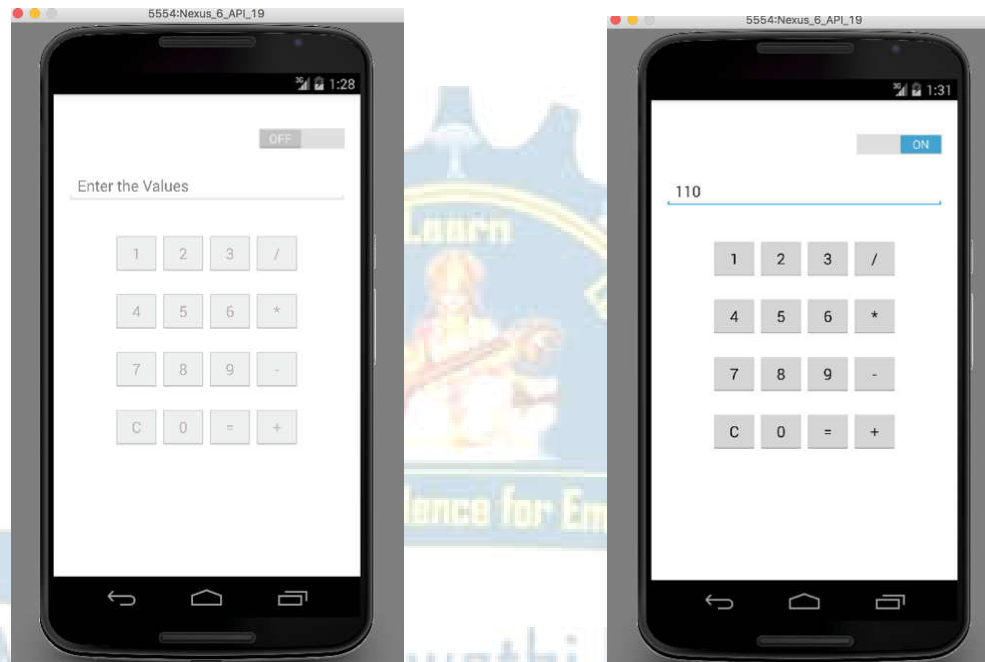

**Step 4:** Thus program to illustrate the Native calculator application for Android App was created.

## EX NO 4

## Graphical Primitives

### Aim:

To create a program to illustrates the Graphical Primitives for Android App

### Algorithm:

**Step1:** Create an android project using android IntelliJ Idea 15.


**Step 2:** After creating the project, open the java file named MainActivity.xml.

### MainActivity.java

```
package com.example.kamarajios33.graphics;
import android.content.Intent;
import android.support.v7.app.AppCompatActivity;
import android.os.Bundle;
import android.content.Context;
import android.graphics.Canvas;
import android.graphics.Color;
import android.graphics.Paint;
import android.graphics.RectF;
import android.view.View;
public class MainActivity extends AppCompatActivity {
    DemoView dv;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        dv = new DemoView(this);
        setContentView(dv);
    }
    private class DemoView extends View
    {
        public DemoView(Context context)
        {
            super(context);
        }
        @Override
        protected void onDraw(Canvas canvas)
        {
            super.onDraw(canvas);
            Paint ob=new Paint();
            ob.setStyle(Paint.Style.FILL);
            ob.setColor(Color.WHITE);
            canvas.drawPaint(ob);
            ob.setColor(Color.GRAY);
```

```
canvas.drawCircle(100, 100, 60, ob);  
ob.setColor(Color.CYAN);  
canvas.drawCircle(200, 50, 30, ob);  
ob.setColor(Color.MAGENTA);  
canvas.drawRect(200, 200, 400, 400, ob);  
ob.setColor(Color.RED);  
canvas.drawLine(250,50,350,400,ob);  
canvas.rotate(-45); }}}
```

**Step 3:** The output of the above code is as follows.

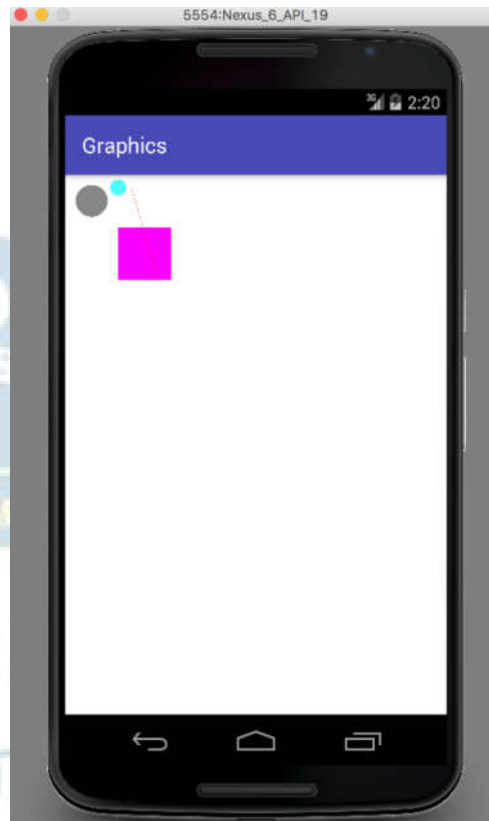

**Step 4:** Thus program to illustrate the Graphics Primitives for Android App was created.

## EX NO 5

## Running the SQLite App

### Aim:

To create a program to illustrates the Running the SQLite for Android App

### Algorithm:

**Step 1:** Create an android project using android studio

**Step 2:** Create two resource files (\*.xml) and two activity files (\*.java) named activity\_main.xml and MainActivity.java

**Step 3:** Open res directory -> layout -> activity\_main.xml -> Click -> Design button at bottom of the Android Studio. Put the necessary components for both resource file (activity\_main.xml)

**Step 4:** Design (After the design part, the xml code will be generated automatically in the layout file )



activity\_main.xml





### Step 5: Create an activity file

#### MainActivity.java

```
package com.example.DBconc;
import android.app.Activity;
import android.app.AlertDialog;
import android.content.Context;
import android.database.Cursor;
import android.database.sqlite.SQLiteDatabase;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;

public class MyActivity extends Activity implements View.OnClickListener {
    EditText editEmpid,editName,editsalary;
    Button btnAdd,btnDelete,btnModify,btnView,btnViewAll;
    SQLiteDatabase db;
    /** Called when the activity is first created. */
    @Override
    public void onCreate(Bundle savedInstanceState)
    {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);
        editEmpid=(EditText)findViewById(R.id.editEmpid);
        editName=(EditText)findViewById(R.id.editName);
        editsalary=(EditText)findViewById(R.id.editsalary);
        btnAdd=(Button)findViewById(R.id.btnAdd);
        btnDelete=(Button)findViewById(R.id.btnDelete);
        btnModify=(Button)findViewById(R.id.btnModify);
        btnView=(Button)findViewById(R.id.btnView);
        btnViewAll=(Button)findViewById(R.id.btnViewAll);
        btnAdd.setOnClickListener(this);
        btnDelete.setOnClickListener(this);
        btnModify.setOnClickListener(this);
        btnView.setOnClickListener(this);
        btnViewAll.setOnClickListener(this);
        db=openOrCreateDatabase("EmployeeDB", Context.MODE_PRIVATE, null);
        db.execSQL("CREATE TABLE IF NOT EXISTS employee(empid VARCHAR,name
VARCHAR,salary VARCHAR);");
    }
    public void onClick(View view)
    {
        if(view==btnAdd)
        {
```



```
if(editEmpid.getText().toString().trim().length()==0||
    editName.getText().toString().trim().length()==0||
    editsalary.getText().toString().trim().length()==0)
{
    showMessage("Error", "Please enter all values");
    return;
}
db.execSQL("INSERT INTO employee
VALUES("+editEmpid.getText()+","+editName.getText()+","+editsalary.getText()+");");
showMessage("Success", "Record added");
clearText();
}
if(view==btnDelete)
{
    if(editEmpid.getText().toString().trim().length()==0)
    {
        showMessage("Error", "Please enter Employee id");
        return;
    }
    Cursor c=db.rawQuery("SELECT * FROM employee WHERE
empid="+editEmpid.getText()+"" , null);
    if(c.moveToFirst())
    {
        db.execSQL("DELETE FROM employee WHERE
empid="+editEmpid.getText()+""");
        showMessage("Success", "Record Deleted");
    }
    else
    {
        showMessage("Error", "Invalid Employee id");
    }
    clearText();
}
if(view==btnModify)
{
    if(editEmpid.getText().toString().trim().length()==0)
    {
        showMessage("Error", "Please enter Employee id");
        return;
    }
    Cursor c=db.rawQuery("SELECT * FROM employee WHERE
empid="+editEmpid.getText()+"" , null);
    if(c.moveToFirst())
    {
        db.execSQL("UPDATE employee SET
name="+editName.getText()+",salary="+editsalary.getText()+"" WHERE
```




```
empid="" + editEmpid.getText() + """);
    showMessage("Success", "Record Modified");
}
else
{
    showMessage("Error", "Invalid Rollno");
}
clearText();
}
if(view == btnView)
{
    if(editEmpid.getText().toString().trim().length() == 0)
    {
        showMessage("Error", "Please enter Employee id");
        return;
    }
    Cursor c = db.rawQuery("SELECT * FROM employee WHERE
empid="" + editEmpid.getText() + """, null);
    if(c.moveToFirst())
    {
        editName.setText(c.getString(1));
        editSalary.setText(c.getString(2));
    }
    else
    {
        showMessage("Error", "Invalid Employee id");
        clearText();
    }
}
if(view == btnViewAll)
{
    Cursor c = db.rawQuery("SELECT * FROM employee", null);
    if(c.getCount() == 0)
    {
        showMessage("Error", "No records found");
        return;
    }
    StringBuffer buffer = new StringBuffer();
    while(c.moveToNext())
    {
        buffer.append("Employee id: " + c.getString(0) + "\n");
        buffer.append("Name: " + c.getString(1) + "\n");
        buffer.append("Salary: " + c.getString(2) + "\n\n");
    }
    showMessage("Employee details Details", buffer.toString());
}
```

```

}
public void showMessage(String title,String message)
{
    AlertDialog.Builder builder=new AlertDialog.Builder(this);
    builder.setCancelable(true);
    builder.setTitle(title);
    builder.setMessage(message);
    builder.show();
}
public void clearText()
{
    editEmpid.setText("");
    editName.setText("");
    editsalary.setText("");
    editEmpid.requestFocus();
}
}
}

```

**Step 6:** Run the project. While running, the following output will be shown in the emulator

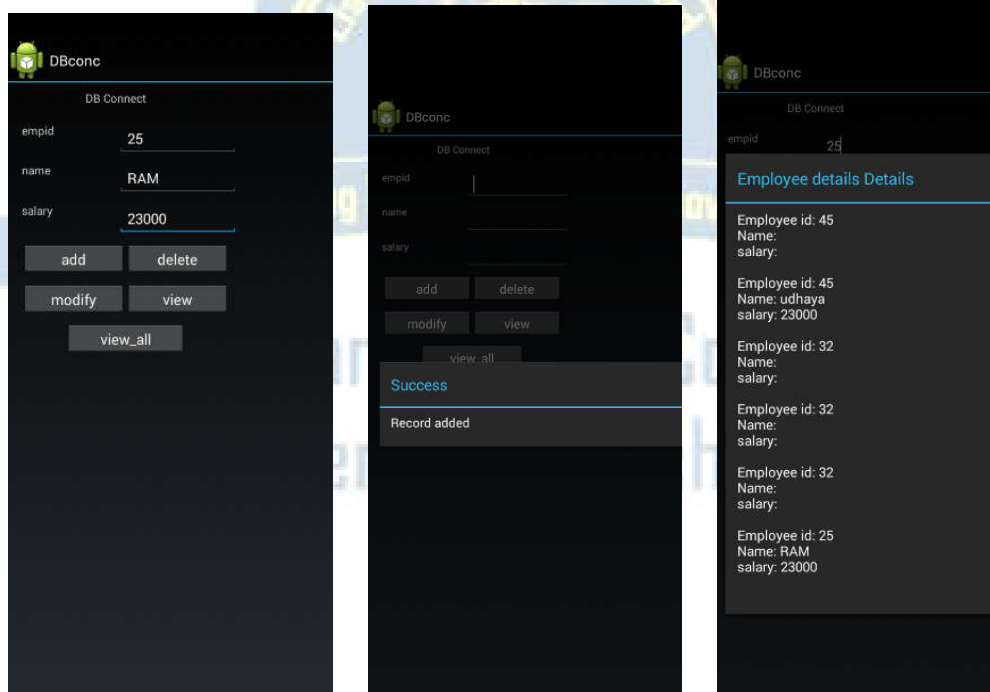

**Step 7:** Thus program to illustrate the Running the SQLite for Android App was created.

## EX NO 6


## Running the Multithreading App

**Step 1:** Select File -> New -> Project -> Android Application Project (or) Android Project. Fill the forms and click “Finish” button.

**Step 2:** Open res -> layout -> activity\_main.xml -> click Design -> Put the necessary components in the layout.

**Step 3:** Create a layout file for UI ( Design for UI after that the code will be generated automatically in activity\_main.xml )

### activity\_main.xml

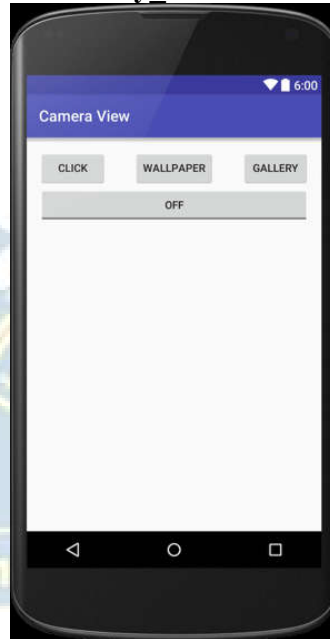

(Image View Component also inserted)

**Step 4:** Right Click res -> New -> Android Resource directory -> select “raw”  
Resource type -> Ok

**Step 5:** Open res -> raw and add \*.mp3 file

**Step 6:** Open java -> Main Activity.java and add following code

### MainActivity.java

```
package com.example.kamarajios33.cameraview;
import android.content.Intent;
import android.database.Cursor;
import android.graphics.Bitmap;
import android.graphics.BitmapFactory;
import android.media.MediaPlayer;
import android.net.Uri;
import android.provider.MediaStore;
import android.support.v7.app.AppCompatActivity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
```

```
import android.widget.ImageView;
import android.widget.Toast;
import android.widget.ToggleButton;
public class MainActivity extends AppCompatActivity {
private static final int CAMERA_REQUEST= 1888;
String p;
ImageView i;
Button bu,wall,b3;
Bitmap photo;
ToggleButton t;
MediaPlayer m;
int flag = 0;
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_main);
i=(ImageView)findViewById(R.id.img);
bu=(Button)findViewById(R.id.b1);
wall=(Button)findViewById(R.id.wall);
b3=(Button)findViewById(R.id.b3);
t=(ToggleButton)findViewById(R.id.tb);
bu.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
Intent in = new Intent(MediaStore.ACTION_IMAGE_CAPTURE);
startActivityForResult(in,CAMERA_REQUEST);
}
});
m = MediaPlayer.create(MainActivity.this,R.raw.sam);
wall.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
try {
if (flag == 1) {
getApplicationContext().setWallpaper(BitmapFactory.decodeFile(p));
Toast.makeText(getApplicationContext(), "Wallpaper Changed from
Gallery", Toast.LENGTH_SHORT).show();
} else if (flag == 2) {
getApplicationContext().setWallpaper(photo);
Toast.makeText(getApplicationContext(), "Wallpaper Changed from
Camera", Toast.LENGTH_SHORT).show();
}
else {
Toast.makeText(getApplicationContext(), "Wallpaper Not Set",
Toast.LENGTH_SHORT).show();
}
}
}
```


```
}
catch (Exception e)
{
e.printStackTrace();
}
});
b3.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
Intent in1 = new
Intent(Intent.ACTION_PICK,MediaStore.Images.Media.EXTERNAL_CONTENT_U
RI);
startActivityForResult(in1,2);
}
});
t.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
boolean checked = ((ToggleButton) v).isChecked();
if(checked)
{
m.start();
t.setText("Media Player On");
}
else {
m.pause();
t.setText("Media Player Pause");
}
}
});
protected void onActivityResult(int requestCode,int resultCode,Intent data)
{
if(requestCode==CAMERA_REQUEST)
{
photo = (Bitmap)data.getExtras().get("data");
i.setImageBitmap(photo);
flag =2;
}
if(requestCode==2 && resultCode == RESULT_OK)
{
Uri sel = data.getData();
String[] file = {MediaStore.Images.Media.DATA};
Cursor c = getContentResolver().query(sel, file, null, null, null);
c.moveToFirst();
```

```
int co = c.getColumnIndex(file[0]);  
p = c.getString(co);  
c.close();  
i.setImageBitmap(BitmapFactory.decodeFile(p));  
flag = 1;  
}}}
```


**Step 7:** Open AndroidManifest.xml and add following code

```
<uses-permission android:name="android.permission.SET_WALLPAPER"/>  
<uses-permission  
android:name="android.permission.WRITE_EXTERNAL_STORAGE"/>  
<uses-permission  
android:name="android.permission.READ_EXTERNAL_STORAGE"/>
```

**Step 8:** The Output of the above code is as follows. As we have discussed, Multithreading App is easy.

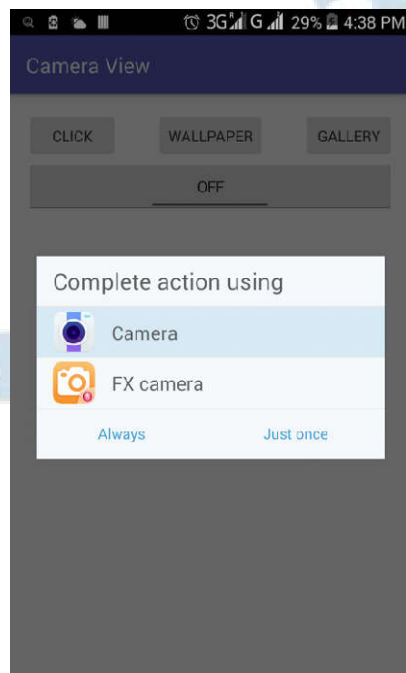


Click **CLICK** button

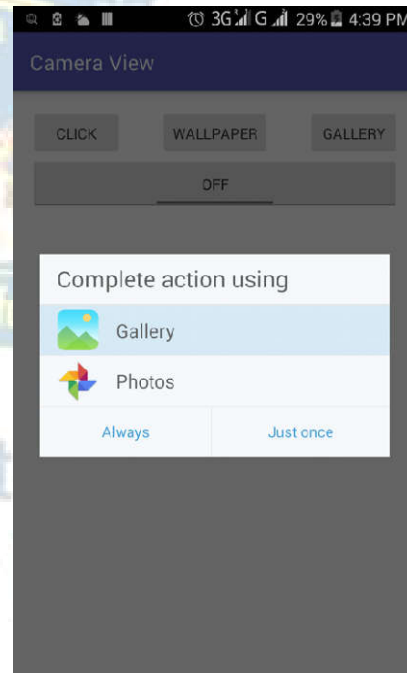


Click **GALLERY** button




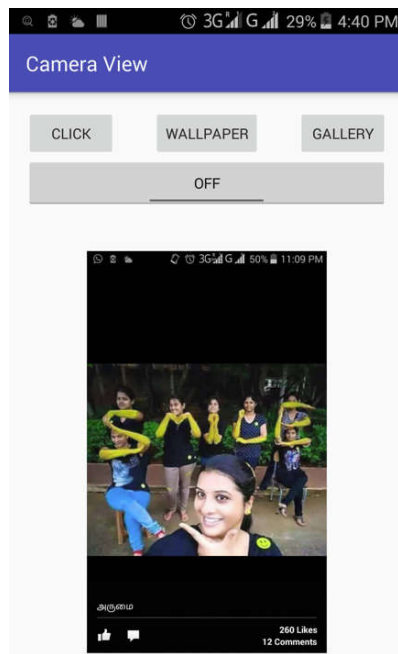


After click the **GALLERY** button

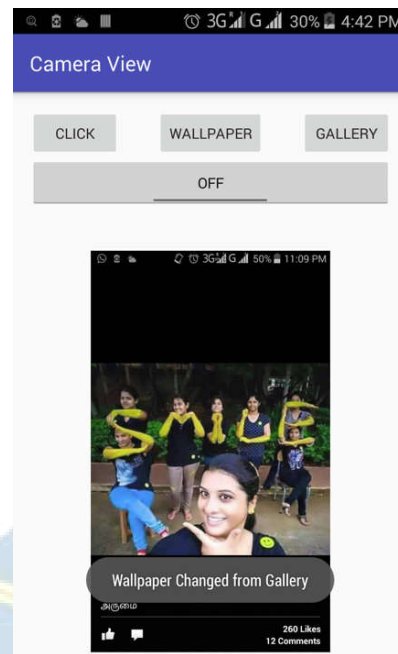

Click **WALLPAPER** button

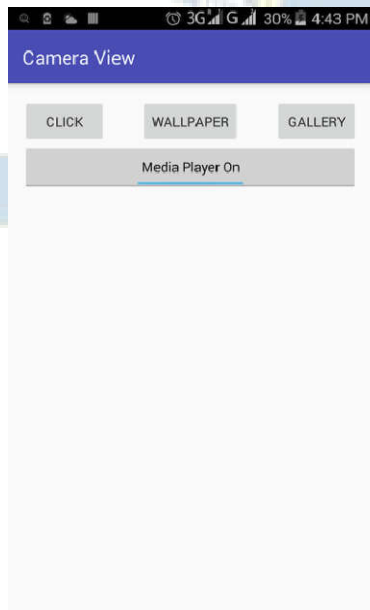

Click Toggle (OFF) button

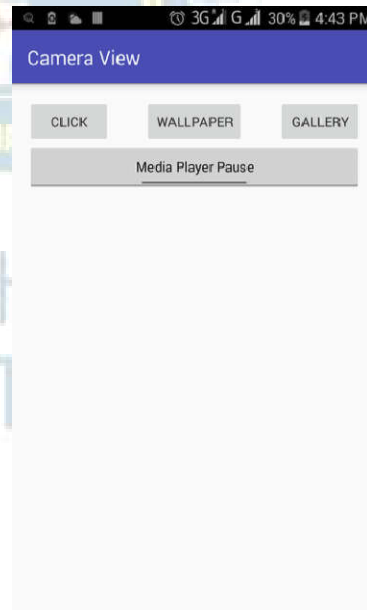

## EX NO 7

## External data Storage

### Aim :


This program describe implement an application that writes data to the SD card

### Algorithm:

**Step 1:** Select File -> New -> Project -> Android Application Project (or) Android Project. Fill the forms and click “Finish” button.

**Step 2:** Open res -> layout -> activity\_main.xml -> click Design -> Put the necessary components in the layout.

**Step 3:** Create a layout file for UI ( Design for UI after that the code will be generated automatically in activity\_main.xml )

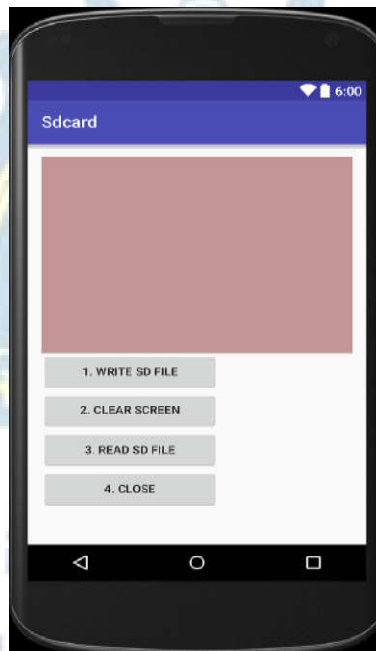

Design - activity\_main.xml

**Step 4:** Create an activity file

### MainActivity.java

```
package com.example.kamarajioslab01.sdcard;
import android.os.Environment;
import android.support.v7.app.AppCompatActivity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;
import java.io.BufferedReader;
import java.io.File;
```


```
import java.io.FileInputStream;
import java.io.FileOutputStream;
import java.io.InputStreamReader;
import java.io.OutputStreamWriter;
public class MainActivity extends AppCompatActivity {
    EditText txtData;
    Button btnWriteSDFFile;
    Button btnReadSDFFile;
    Button btnClearScreen;
    Button btnClose;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        txtData = (EditText) findViewById(R.id.txtData);
        txtData.setHint("Enter some lines of data here...");
        btnWriteSDFFile = (Button) findViewById(R.id.btnWriteSDFFile);
        btnWriteSDFFile.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                // write on SD card file data in the text box
                try {
                    //File file= Environment.getExternalStorageDirectory();
                    File myFile = new File("/sdcard/mysdfile.txt");
                    myFile.createNewFile();
                    FileOutputStream fOut = new FileOutputStream(myFile);
                    OutputStreamWriter myOutWriter =
                    new OutputStreamWriter(fOut);
                    myOutWriter.append(txtData.getText());
                    myOutWriter.close();
                    fOut.close();
                    Toast.makeText(getApplicationContext(),
                    "Done writing SD 'mysdfile.txt'",
                    Toast.LENGTH_SHORT).show();
                } catch (Exception e) {
                    Toast.makeText(getApplicationContext(), e.getMessage(),
                    Toast.LENGTH_SHORT).show();
                }
            }
        }); // btnWriteSDFFile
        btnReadSDFFile = (Button) findViewById(R.id.btnReadSDFFile);
        btnReadSDFFile.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                // write on SD card file data in the text box
                try {
```

```
File myFile = new File("/sdcard/mysdfile.txt");
FileInputStream fln = new FileInputStream(myFile);
BufferedReader myReader = new BufferedReader(
new InputStreamReader(fln));
String aDataRow = "";
String aBuffer = "";
while ((aDataRow = myReader.readLine()) != null) {
aBuffer += aDataRow + "\n";
}
txtData.setText(aBuffer);
myReader.close();
Toast.makeText(getApplicationContext(),
"Done reading SD 'mysdfile.txt'",
Toast.LENGTH_SHORT).show();
} catch (Exception e) {
Toast.makeText(getApplicationContext(), e.getMessage(),
Toast.LENGTH_SHORT).show();
}
} // onClick
}); // btnReadSDFile
btnClearScreen = (Button) findViewById(R.id.btnClearScreen);
btnClearScreen.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
txtData.setText("");
}
}); // btnClearScreen
btnClose = (Button) findViewById(R.id.btnClose);
btnClose.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
// clear text box
finish();
}
}); // btnClose
} // onCreate
} // AndSDcard
```

**Step 5:** Open **AndroidManifest.xml** and add following code

```
<uses-permission
android:name="android.permission.WRITE_EXTERNAL_STORAGE"/>
<uses-permission
android:name="android.permission.READ_EXTERNAL_STORAGE"/>
```

**Step 6:** Run the Project. While running, the following output will be shown in the emulator.

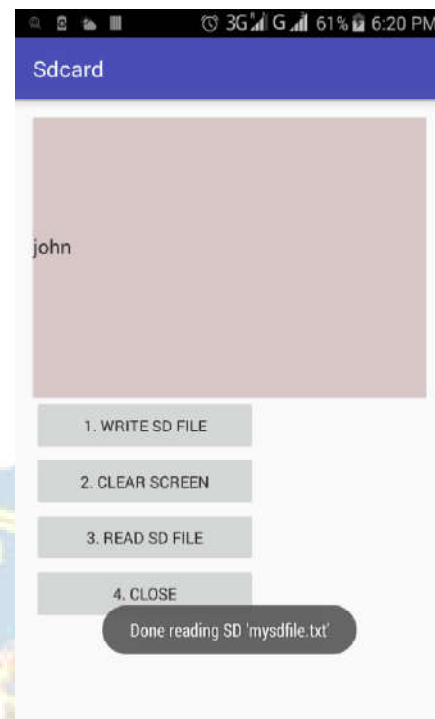



## EX NO 8

## Running the Alert App

**Step 1:** Select File -> New -> Project -> Android Application Project (or) Android Project. Fill the forms and click “Finish” button.

**Step 2:** Create an activity file

### MainActivity.java

```
package com.example.notimsg;
import android.app.Activity;
import android.app.AlertDialog;
import android.content.Context;
import android.content.DialogInterface;
import android.os.Bundle;
import android.view.View;
import android.view.Window;
import android.widget.Button;
import android.widget.Toast;

public class MyActivity extends Activity {
    Button b;
    protected void onCreate(Bundle savedInstanceState) {


        requestWindowFeature(Window.FEATURE_NO_TITLE);
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);
        b=(Button)findViewById(R.id.button);
        b.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                dispose();
            }
        });
    }

    public void dispose() {
        AlertDialog.Builder builder = new AlertDialog.Builder(this);
        Context context = getApplicationContext();

        String text = "Hello toast!";
        int duration = Toast.LENGTH_SHORT;
        Toast toast = Toast.makeText(context, text, duration); toast.show();
        Toast.makeText(this, "Heelo Toast ", Toast.LENGTH_SHORT).show();
        builder.setMessage("Do you want to close this application ?")
            .setCancelable(false)
            .setPositiveButton("Yes", new DialogInterface.OnClickListener() {
```

```
public void onClick(DialogInterface dialog, intid) {  
    finish();  
}  
}  
    .setNegativeButton("No", new DialogInterface.OnClickListener() {  
public void onClick(DialogInterface dialog, intid) {  
  
    dialog.cancel();  
    }  
});  
  
AlertDialog alert = builder.create();  
alert.setTitle("Alertdemo");  
alert.show();  
  
    }  
  
}
```

**Step 3:** Run the Project. While running, the following output will be shown in the emulator.

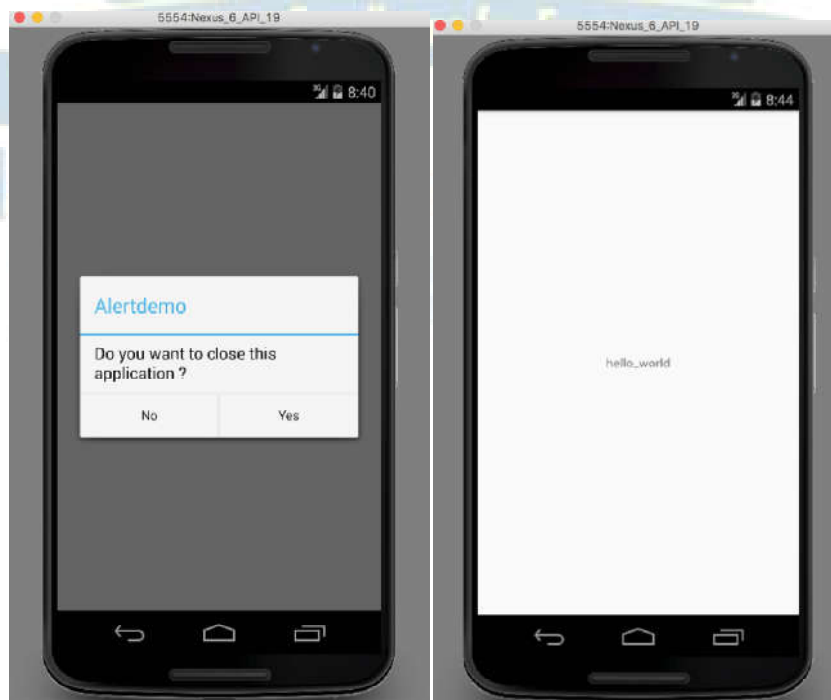

## EX NO 9

## GPS LOCATOR

### Step 1:

To use GPS in your application first of all you must specify the uses-permission in Android manifest file:AndroidManifest.xml

```
<manifest>  
<uses-permission  
android:name="android.permission.ACCESS_FINE_LOCATION"></usespermission>
```

### Step 2: Create a Activity Layout

```
<?xml version="1.0" encoding="utf-8"?>  
<LinearLayoutxmlns:android="http://schemas.android.com/apk/res/andro id"  
android:layout_width="fill_parent"  
android:layout_height="fill_parent"  
android:orientation="vertical" >  
<TextViewandroid:id="@+id/gps_text"  
android:layout_width="fill_parent"  
android:layout_height="wrap_content"  
android:text="@string/hello" />  
</LinearLayout>
```

### Step 3: Create a Java Class file


```
import java.io.IOException;  
import java.util.List;  
import java.util.Locale;  
import android.app.Activity;  
import android.content.Context;  
import android.location.Address;  
import android.location.Geocoder;  
import android.location.Location;  
import android.location.LocationListener;  
import android.location.LocationManager;  
import android.os.Bundle;  
import android.widget.TextView;  
import android.widget.Toast;  
public class CurrentLocationActivity extends Activity {  
/** Called when the activity is first created. */  
Private TextView;  
super.onCreate(savedInstanceState);  
setContentView(R.layout.main);  
gpsLocationView=(TextView) findViewById(R.id.gps_text);  
/* Use the LocationManager class to obtain GPS locations */
```



```
LocationManager
mlocManager=(LocationManager)getService(Context.LOCATION_SERVICE);
LocationListenrmlocListener = new MyLocationListener();
mlocManager.requestLocationUpdates(LocationManager.GPS_PROVIDER, 0,
0, mlocListener);
}
/* Class My Location Listener */
public class MyLocationListener implements LocationListener
{
@Override
public void onLocationChanged(Location loc)
{
loc.getLatitude();
loc.getLongitude();
Geocoder gcd = new Geocoder(getApplicationContext(),
Locale.getDefault());
Try
{
addresses = gcd.getFromLocation(loc.getLatitude(),loc.getLongitude(), 1);
}
catch (IOException e)
{
// TODO Auto-generated catch block
e.printStackTrace();
}
String text=(addresses!=null?"City : "+addresses.get(0).getSubLocality()+"\n Country
: "+addresses.get(0).getCountryName():"Unknown Location";
String locationValue = "My current location is: "+ text;
gpsLocationView.setText(locationValue);
}
@Override
public void onProviderDisabled(String provider)
{
Toast.makeText(getApplicationContext(),"Gps
Disabled",Toast.LENGTH_SHORT ).show();
}
@Override
public void onProviderEnabled(String provider)
{
Toast.makeText(getApplicationContext(),"Gps
Enabled",Toast.LENGTH_SHORT).show();
}
@Override
public void onStatusChanged(String provider, int status, Bundle extras)
{
}
}
```

}}  
}}

Output :

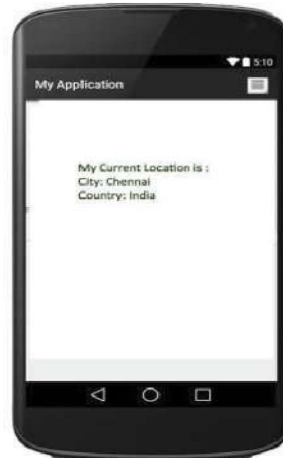


Nadar Saraswathi College of  
Engineering & Technology

## EX NO 10

## Running the alarm Clock App

**Step 1:** Create an android project using android studio

**Step 2:** Create a layout file for UI.

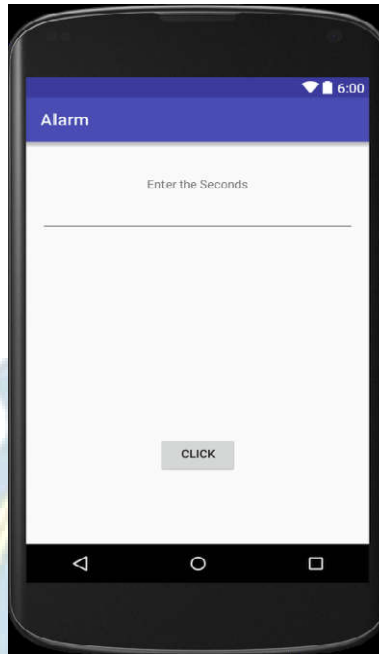

### activity\_main.xml

( After design, the code will be generated automatically in activity\_main.xml file)

**Step 3:** Right Click res -> New -> Android Resource directory -> select “raw” Resource type -> Ok

**Step 4:** Open res -> raw and add \*.mp3 file

**Step 5:** After creating the layout, open the manifest file named AndroidManifest.xml. Define the receiver using the <receiver> tag.

The code for **AndroidManifest.xml** is given below.

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
package="com.example.kamarajios33.alaran" >
<application
android:allowBackup="true"
android:icon="@mipmap/ic_launcher"
android:label="@string/app_name"
android:supportsRtl="true"
android:theme="@style/AppTheme" >
```

```
<activity android:name=".MainActivity" >
<intent-filter>
<action android:name="android.intent.action.MAIN" />
<category android:name="android.intent.category.LAUNCHER" />
</intent-filter>
</activity>
<receiver android:name="alarm"/>
</application>
</manifest>
```

**Step 6:** Create a alarm class by receiving the broadcast service.

#### **alarm.java**

```
package com.example.kamarajios33.alarm;
import android.content.BroadcastReceiver;
import android.content.Context;
import android.content.Intent;
import android.media.MediaPlayer;
import android.widget.*;
/**
 * Created by kamarajios33 on 13/11/15.
 */
public class alarm extends BroadcastReceiver {
    MediaPlayer m;
    public void onReceive(Context context,Intent intent)
    {
        m = MediaPlayer.create(context,R.raw.cine1);
        m.start();
        Toast.makeText(context, "Alarm...Get up", Toast.LENGTH_LONG).show();
    }
}
```

**Step 7:** Create an activity file.

#### **MainActivity.java**

```
package com.example.kamarajios33.alarm;
import android.app.AlarmManager;
import android.app.PendingIntent;
import android.content.Intent;
import android.support.v7.app.AppCompatActivity;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.widget.Toast;
public class MainActivity extends AppCompatActivity {
    Button b1;
    TextView t1;
```

```
EditText e1;
@Override
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main);
    b1=(Button)findViewById(R.id.b1);
    t1=(TextView)findViewById(R.id.t1);
    e1=(EditText)findViewById(R.id.e1);
    b1.setOnClickListener(new View.OnClickListener() {
        @Override
        public void onClick(View v) {
            startalert();}
    });}
public void startalert()
{
    int i = Integer.parseInt(e1.getText().toString());
    Intent in = new Intent(this,alarm.class);
    PendingIntent pendingIntent = PendingIntent.getBroadcast(getApplicationContext(),
    900000,in,0);
    AlarmManager
    alarmManager=(AlarmManager) getSystemService(ALARM_SERVICE);
    alarmManager.set(AlarmManager.RTC_WAKEUP,System.currentTimeMillis()+
    (i*1000),pendingIntent);
    Toast.makeText(getApplicationContext(),"Alaram set in " + i + "
    Seconds",Toast.LENGTH_LONG).show();
}
}
```

**Step 8:** Run the Project, While running, the following output will be shown in emulator.

